

An eco-friendly and
secure investment!



CTC EcoLogic S

Simple but logical heat pump control,
model EA and EP



- Simple but logical control
- Internet connectivity as standard
- 4.3 inch touchscreen with 12 languages
- Suitable for both ground source and air/water heat pumps
- Easy control for a heat pump connected to a hot water storage tank
- Can also control a heatpump connected to an older indoor module
- Enables installation of CTC products with other brands

Find a CTC distributor in your country - www.ctc-heating.com



MADE IN SWEDEN

CTC EcoLogic S EA/EP

CTC EcoLogic S is a simpler type of heat pump control and is available in two designs. One developed for the CTC EcoAir air-to-water heat pumps and one for the CTC EcoPart geothermal heat pumps.

CTC EcoLogic S enables a heat pump to be installed together with a hot water storage


tank or with our older indoor modules, such as CTC EcoEI.

CTC EcoLogic S can also be used when installing a heat pump together with products with 3-way valves for hot water production, such as exhaust air heat pumps.


CTC EcoLogic S is equipped with a 4.3 inch touchscreen with clear symbols and twelve language options. It is possible to mirror the display on your home network and you can also control your product remotely with the MyUplink app. The control comes with wall mount, manual and 5 m or 15 m connection cable.

Examples of installation


- towards an existing heating system

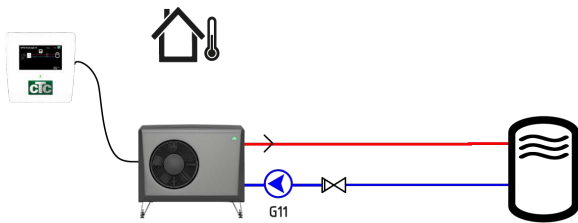

- towards older indoor modules e.g. CTC EcoEI

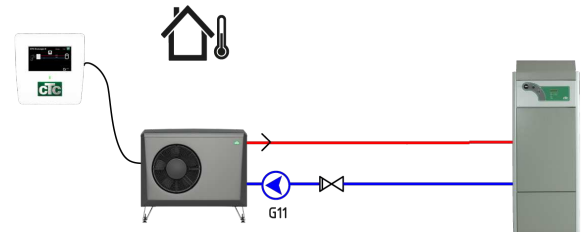

- towards a system with diverting valve for hot water production e.g. exhaust air heat pumps

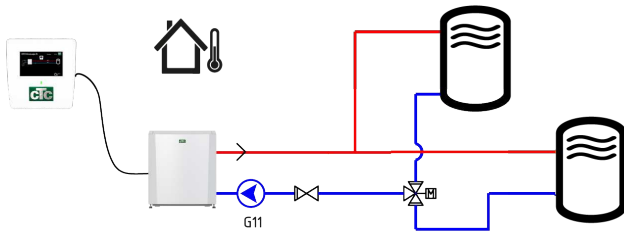

Delivery includes EA:

Control unit with wall bracket, 15 m communication cable and manual.

Compatible heat pumps:

CTC EcoAir
from: 7311/7312-2101-0030

Delivery includes EP:

Control unit with wall bracket, 5 m communication cable, outdoor sensor and manual.

Compatible heat pumps:

CTC EcoPart
from: 7302-2101-0051

Technical data		EA	EP
CTC no.		589560301	589560302
Weight (packaged weight)	kg	0.8 (1)	
Dimensions (width x depth x height)	mm	28x159x160	
Electrical Data, connection		24V	
Ingress Protection class (IP)		IP X1	

Energy labelling stickers and data sheets can be downloaded from www.ctc-heating.com/Ecodesign

17003569_1 2024-03-06 The Company reserves the right to change, amend or modify the information contained herein



info@ctc.se
+46 372 88 000

P.O. Box 309 SE-341 26 Ljungby Sweden

